


How to Convert 240 Volt 3-Wire Meter Used on a 120 Volt 2-Wire Circuit


FRONT VIEW OF SOCKET

REAR VIEW OF METER

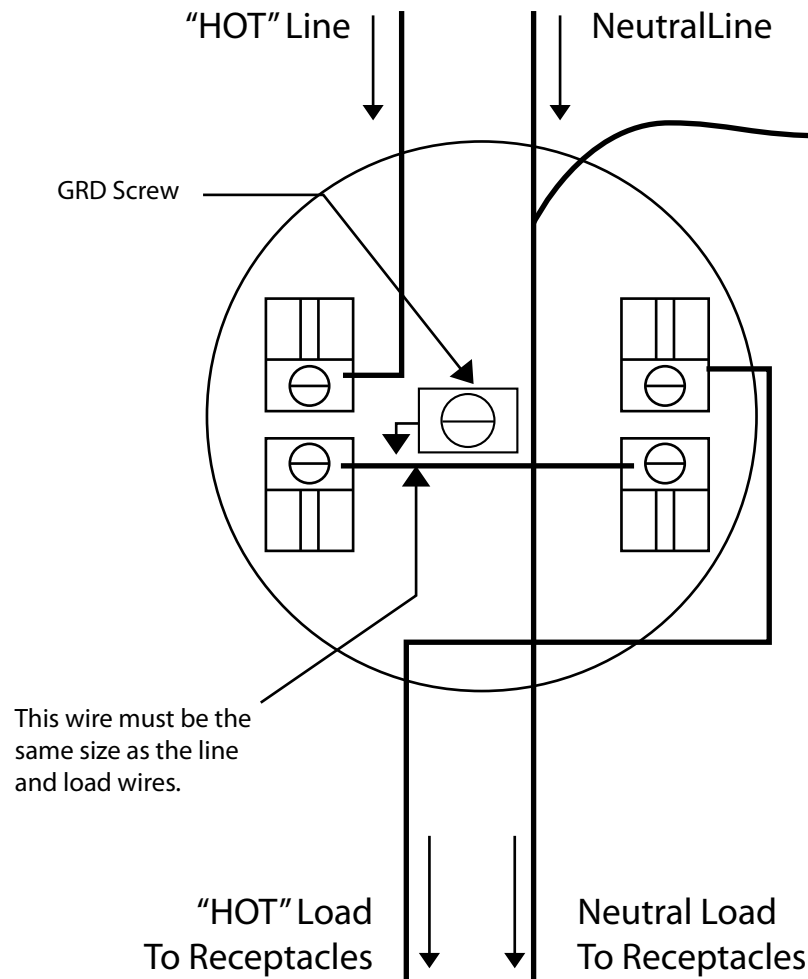

NEUTRAL CONNECTION FROM SOCKET

If line neutral is connected to ground screw, it is OK to connect this wire there also. Otherwise this connection must be made to neutral at some other point. (Suggestion: The neutral terminal in the Power Outlet Box, or neutral terminal on the receptacle.

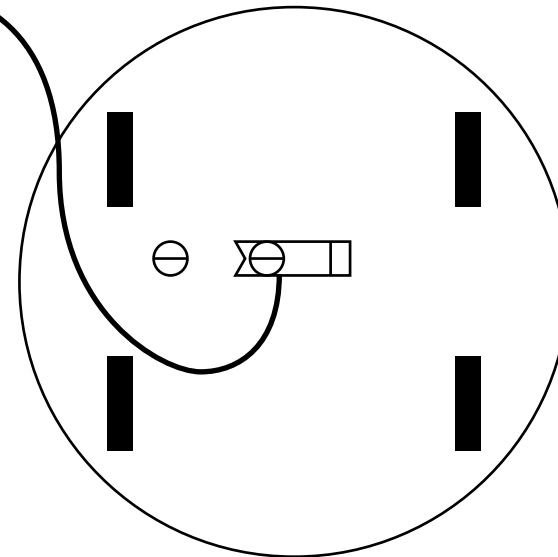

NEUTRAL CONNECTION TO REAR OF METER

Loosen screws and slide clip as far as possible. Connect a small flexible wire (Wire size #18-22) to the screw on which the clip remains when opened. **WARNING!** Connecting this wire to the wrong screw will trip site breaker, or cause a flash, if not protected by a site breaker.